


Morse Taper Holder with Tang DIN 6357

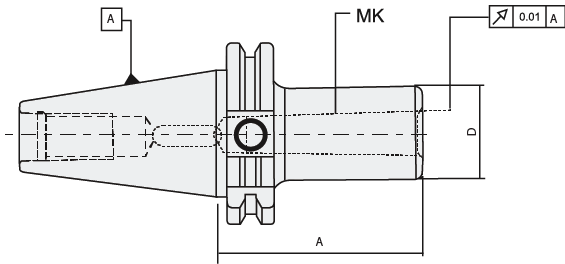

Balanced for G6.3 @ 8,000 rpm

Taper Size	Specification	d	A	Kg
SK 30	MTH-SK30-MT1-050	MT1	50	0.4
	MTH-SK30-MT2-063	MT2	63	0.5
	MTH-SK30-MT3-070	MT3	70	0.7
SK40	MTH-SK40-MT1-050	MT1	50	1.0
	MTH-SK40-MT1-063	MT1	63	1.3
	MTH-SK40-MT1-100	MT1	100	1.5
	MTH-SK40-MT2-050	MT2	50	1.1
	MTH-SK40-MT2-063	MT2	63	1.2
	MTH-SK40-MT2-100	MT2	100	1.3
	MTH-SK40-MT3-063	MT3	63	1.1
	MTH-SK40-MT3-100	MT3	100	1.3
	MTH-SK40-MT3-120	MT3	120	1.4
SK 50	MTH-SK40-MT4-100	MT4	100	1.3
	MTH-SK50-MT1-050	MT1	50	3.5
	MTH-SK50-MT1-063	MT1	63	3.6
	MTH-SK50-MT1-100	MT1	100	3.9
	MTH-SK50-MT2-050	MT2	50	3.5
	MTH-SK50-MT2-063	MT2	63	3.6
	MTH-SK50-MT2-100	MT2	100	3.9
	MTH-SK50-MT3-063	MT3	63	3.5
	MTH-SK40-MT3-100	MT3	100	
	MTH-SK40-MT3-120	MT3	120	
MTH-SK50-MT4-100	MT4	100	3.6	
MTH-SK50-MT5-120	MT5	120	3.9	

• Special GPL Holders offered on request

Spare Parts & Accessories



pull stud